


# JDB 固体润滑轴承

## JDB Solid Lubricating Bearings

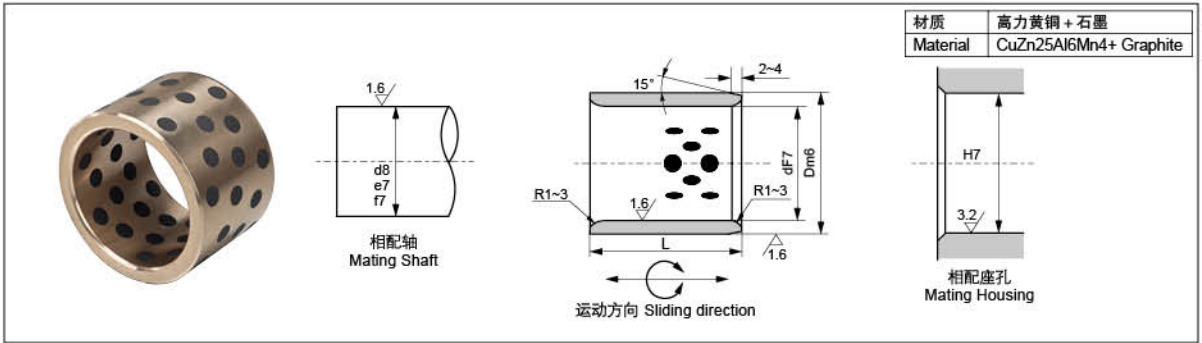

材质	高力黄铜 + 石墨
Material	CuZn25Al6Mn4+ Graphite

单位unit:mm

d	公差 (F7)	D	公差 (m6)	L <sup>-0.10</sup> / <sub>-0.30</sub>																		
				8	10	12	15	20	25	30	35	40	50	60	70	80	90	100	120	140	160	180
8	+0.028	12		●	●	●	●															
10	+0.013	14	+0.018	●	●	●	●	●														
12		18	+0.007	●	●	●	●	●	●													
14	+0.034	20			●	●	●	●	●	●												
16	+0.016	22	+0.021		●	●	●	●	●	●	●											
20		28	+0.008			●	●	●	●	●	●	●										
20		30				●	●	●	●	●	●	●										
25	+0.041	33				●	●	●	●	●	●	●	●									
25	+0.020	35				●	●	●	●	●	●	●	●									
30		38	+0.025				●	●	●	●	●	●	●									
30		40	+0.009				●	●	●	●	●	●	●									
35		45						●	●	●	●	●	●	●								
40		50							●	●	●	●	●	●	●							
40		55							●	●	●	●	●	●	●	●						
45	+0.050	55							●	●	●	●	●	●	●	●						
45	+0.025	56							●	●	●	●	●	●	●	●						
45		60							●	●	●	●	●	●	●	●						
50		60	+0.030						●	●	●	●	●	●	●	●						
50		65	+0.011						●	●	●	●	●	●	●	●						
55		70								●	●	●	●	●	●	●	●					
60		75								●	●	●	●	●	●	●	●	●				
65		80									●	●	●	●	●	●	●	●	●			
70	+0.060	85									●	●	●	●	●	●	●	●	●	●		
70	+0.030	90									●	●	●	●	●	●	●	●	●	●	●	
75		90									●	●	●	●	●	●	●	●	●	●	●	
75		95	+0.035								●	●	●	●	●	●	●	●	●	●	●	
80		100	+0.013									●	●	●	●	●	●	●	●	●	●	
85		100										●	●	●	●	●	●	●	●	●	●	
90		110										●	●	●	●	●	●	●	●	●	●	
100	+0.071	120											●	●	●	●	●	●	●	●	●	●
110	+0.036	130												●	●	●	●	●	●	●	●	●
120		140													●	●	●	●	●	●	●	●
130		150	+0.040													●	●	●	●	●	●	●
140		160	+0.015														●	●	●	●	●	●
150	+0.083	170																●	●	●	●	●
160	+0.043	180																	●	●	●	●
170		190																		●	●	●
180		200	+0.046																		●	●
190	+0.096	210	+0.017																			●
190	+0.050																					●